


TENAK Lab°Low UX600

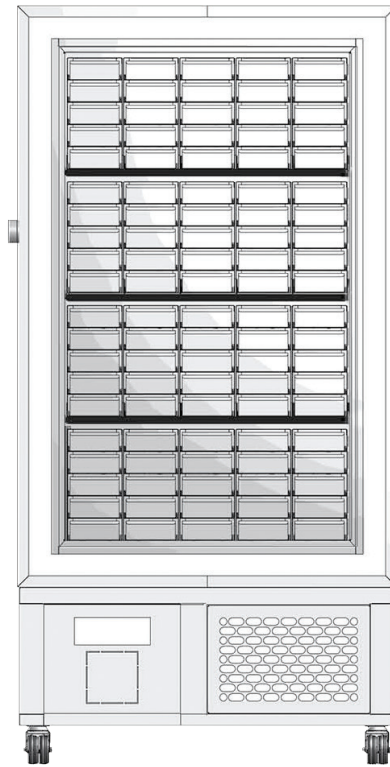

UX600

Technical:

Order no. TE21220
 Volume 600 litres
 Temp. range -60° to -86°
 220V/50Hz European plug

Refrigerant:

1st stage R507
 2nd stage R170d R508b

Dimensions:

Internal dimensions (WxDxH) 750 x 626 x 1276 mm
 Usable compartment dimension (WxDxH) 750 x 592 x 305 mm
 No. of compartments 4
 External dimensions (WxDxH) 1055 x 890 x 1992 mm
 Minimal transport dimensions (WxDxH) 1000 x 865 x 1982 mm
 Net weight 360 kg

Features:

Stainless steel interiors
 Stainless steel inner doors
 Automatic vacuum release
 Heated door seal
 Ethernet and USB connection
 Preparation for CO2 backup
 IQ, OQ, PQ validation documents available
 Battery backup 36 hours
 Integrated key lock
 Cable entry port for validation
 Porthole for external probe
 Door alarm
 Easy filter exchange
 Easy service access
 Casters, 2 with brakes
 Height adjustable shelves